

SHARP

E501U E-Series Laser Projectors



Laser projector ideal for the classroom

Eliminate Lamp Replacements with Long Lasting Laser Technology

The Sharp E-Series LCD, laser projector provides the essential features you need to simply and reliably connect with your audience.

Essential Features for Educational Facilities

- WUXGA resolution and 5,000 lumens brightness allow presenters to leave the lights on and still see the images clearly
- Direct power on and quick power off help maximize presentation time
- Built-in 16-watt speaker provides volume needed for typical classrooms
- Plug and play intuitive setup and operation
- Sufficient connections for multiple sources with dual HDMI inputs

Low Maintenance Environmental Design

- Exceptional laser life with ECO Mode™ technology increases operation up to 20,000 hours, while lowering power consumption
- Power management enables projector to automatically turn off when an incoming signal is not detected from any of the inputs
- Auto power on when a signal is detected
- Quick start (3 to 4 seconds) lets you begin presenting in seconds

Warranty


Registered owners receive a three (3) years or 20,000 hours (whichever comes first) limited warranty

Ships With

Remote control, batteries, power cord

Ordering Model Numbers

XP-E501U-W

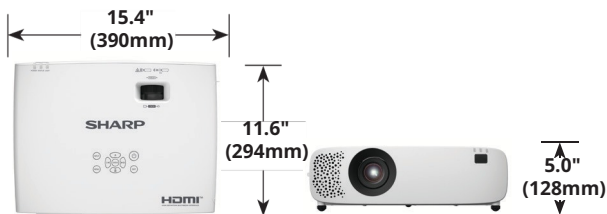

Sharp, NaViSet and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies. The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. All other brand names and product names may be trademarks or registered trademarks of their respective owners. Design and specifications are subject to change without prior notice.

Specifications

Model		XP-E501U
Display Technology		0.64" LCD
Light Output (lumens)	Normal	5,000 Lumens
Light Output (lumens)	Center	5,300 Lumens
Screen Resolution		WUXGA 1920x1200
Resolution Support		Up to 4K UHD (3840x2160) @ 30Hz via HDMI
Aspect Ratio		16:10 (Supports 4:3, 16:9, 21:9)
Contrast Ratio (up to)		3,000,000:1 (Dynamic)
Laser Life		20,000 hours (until 50% brightness)
Screen Size (diagonal)		30–300 in. / 0.762 to 7.6 m
Projection Distance		2.8 to 34.9 ft. / 0.9 to 10.7 m
Lens	Zoom	Manual 1.2x
	Throw Ratio	1.35–1.64:1
	F-number, focal length	F: 1.61–1.76, f: 19.1–23.0 mm
	Keystone Correction	±30° horizontal, ±30° vertical
Synchronization Range	Horizontal	15 to 100 kHz
	Vertical	24 to 85 Hz
SD/HD Video Signal Compatibility		480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 4K UHD
PC Signal Compatibility		VGA, XGA, WXGA, SXGA, UXGA, WUXGA
Macintosh Compatibility		Yes
RGB1 (digital)		HDMI w/ HDCP (V1.4)
RGB2 (digital)		HDMI w/ HDCP (V1.4)
Output Terminals	Audio Out	Stereo Mini Jack (variable)
Wired LAN		RJ-45 (10BASE-T/100BASE-TX)
USB	Type A	Power (1.5A)
	Type B	Service
External Control		RS-232 (D-Sub 9-pin), IR, LAN
Built-in Speaker		16W (mono)
Power Requirements		100–240V AC, 50/60 Hz
Input Current		3.3A – 1.4A
Power Consumption	Normal	330W
	Sleep	5.5W
	Standby	0.37W
Installation Orientation		Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear
Product Dimensions (WxHxD)		15.4 x 5.0 x 11.6 in / 390 x 128 x 294 mm
Net Weight		11.0 lbs / 5.0 kg
Shipping Dimensions (WxDxH)		19.4 x 9.4 x 17.4 in / 492 x 239 x 443 mm
Gross Weight		17.7 lbs / 8.0 kg
Fan Noise		36 dB (default) / 29 dB (silent)
Regulations		UL (62368-1 3rd ed.), FCC Part15 Class B, FDA Laser Notice 57, Prop65, TPCH
Operating Altitude		0–3000 m (10,000 ft), >1700 m/5,577 ft (High Altitude mode)
Operating Temperature		32–113°F / 0–45°C
Operating Humidity		20–80% (Non-condensing)
Storage Altitude		0–12,000 m / 0–39,370 ft
Storage Temperature		14–122°F / –10–50°C
Storage Humidity		10–85% (Non-condensing)
UPC		74000705227

SHARP SINGAPORE ELECTRONICS CORPORATION PTE. LTD.
(Reg No: 198600094W)

438B Alexandra Road, #06-02, Lift Lobby 1, Alexandra Technopark,
Singapore 119968

Hotline: 6419 3388 | Email Address: enquiry@sg.sharp-world.com

For sales-related enquiries, kindly contact:

SHARP